


M X 230 Independent Floor Gully,

Technical Specification,
Material Grade,304-316 stainless steel,
Circular construction, 2mm thick body
upper voids- grout filled prior to delivery to remove any
potential bug traps,


Finish available, electropolished or bead blast,

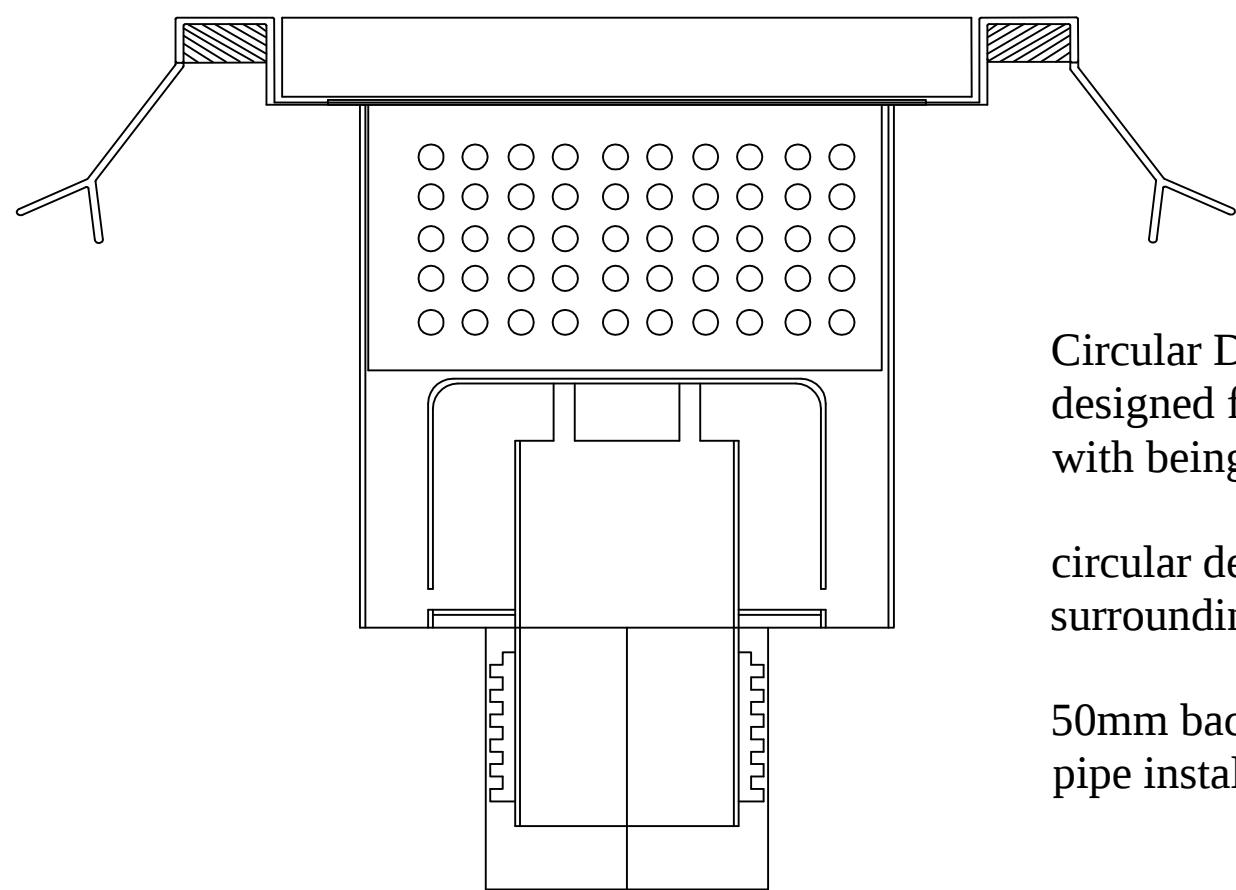


Circular Design,
designed for ease of installation, no problems
with being out of square to adjacent kerbs/walls,

circular design reduces potential cracking to the
surrounding resin /concrete floor,

50mm back inlet available for sink/condensate
pipe installations.

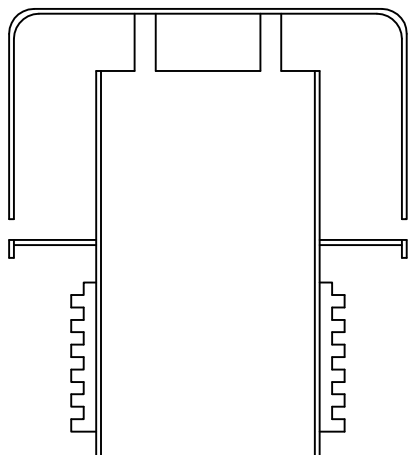

water trap,
removable to allow the underground pipework to
be rodded in the event of a blockage,

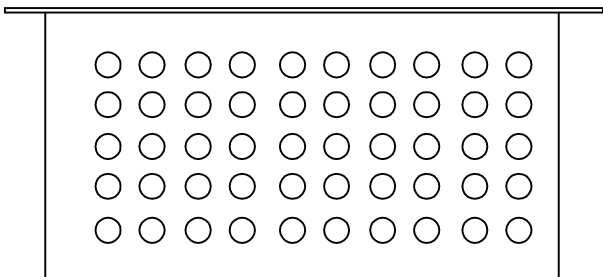

removable sieving basket,
available in 3-5 and 6mm mesh sizes dependant on
the product being filtered,
2mm thick construction to enhance lifespan,